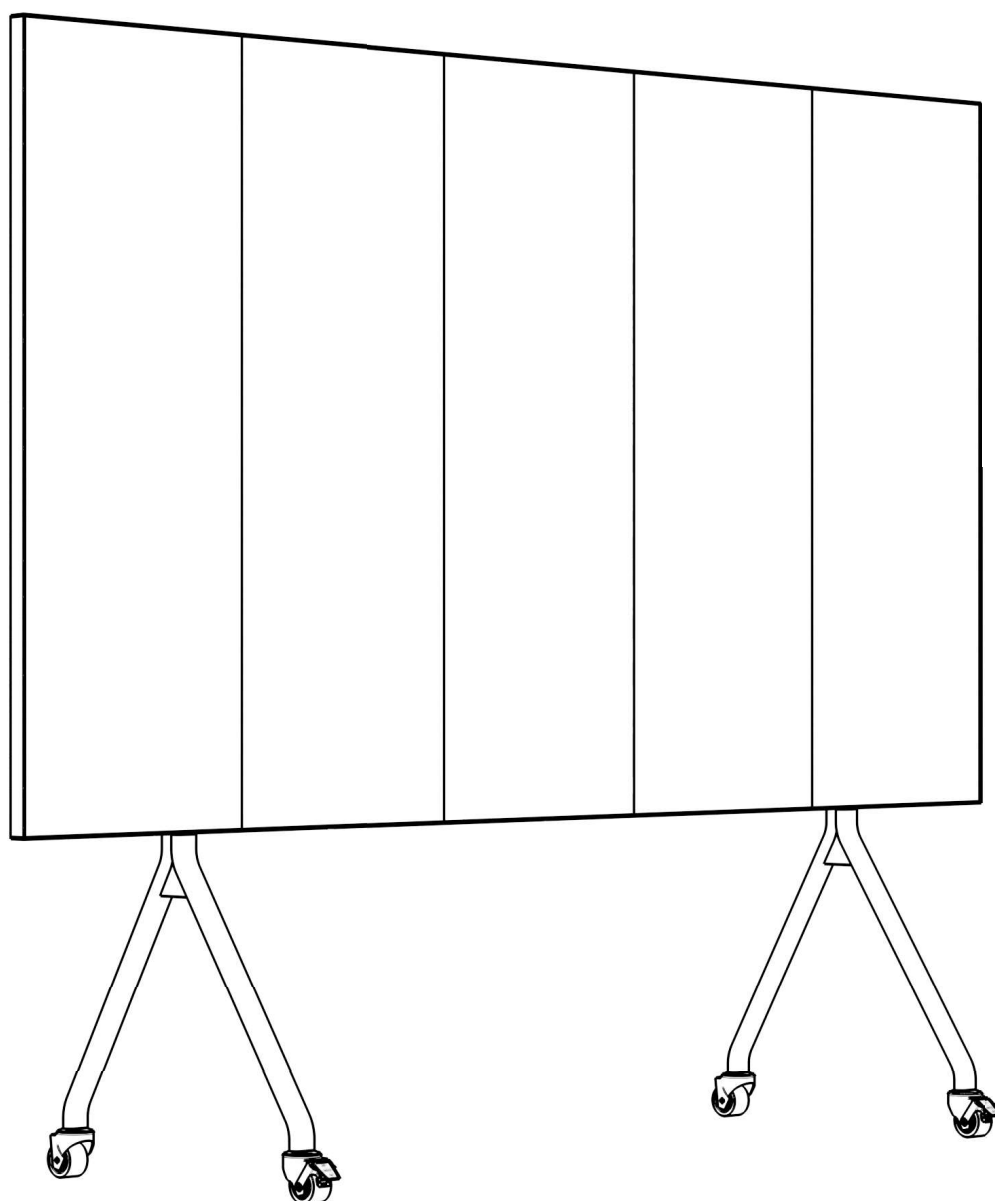


# Streamline Frameless

## Installation Instructions

This installation instruction is based on 135", and the installation of other sizes can also refer to this instruction step for installation


**108"****135"****162"**

# Wooden box packaging and internal placement


The stand/LED Cabinet/display panel is shipped in three packages.

**1**

2000x620x1180mm

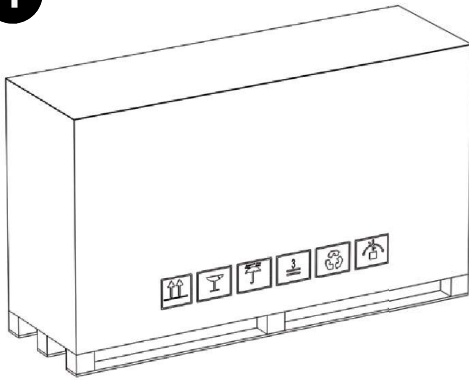


Tripod packaging box

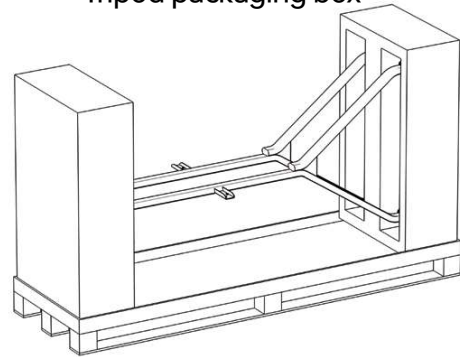


**2**

1880x700x820mm

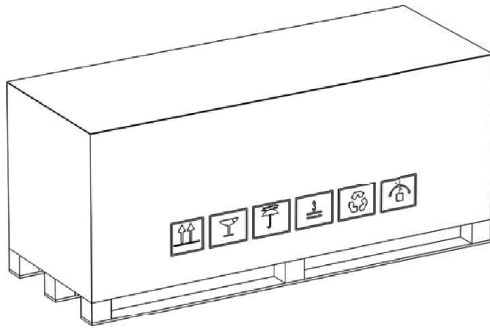


Control Box/LED Cabinet Packaging Box

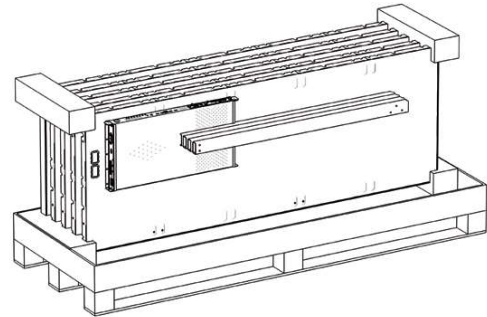


**3**

780x440x800mm





LED Module Packaging Box




# Airline packaging and internal placement

One-piece integrated flight case for easy transportation.

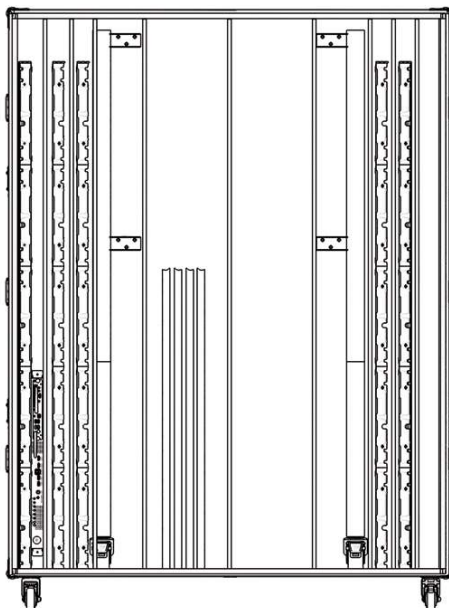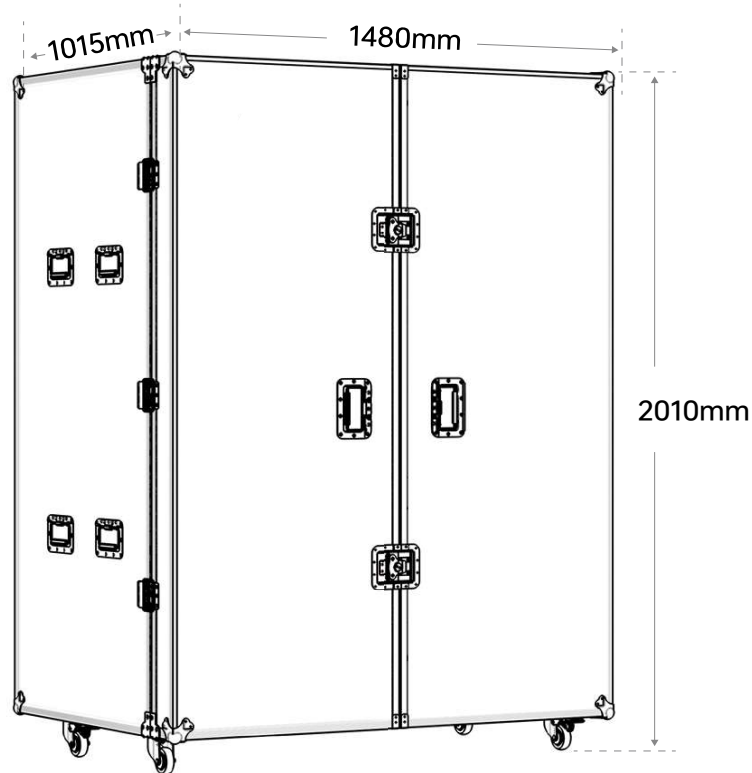

Internal display





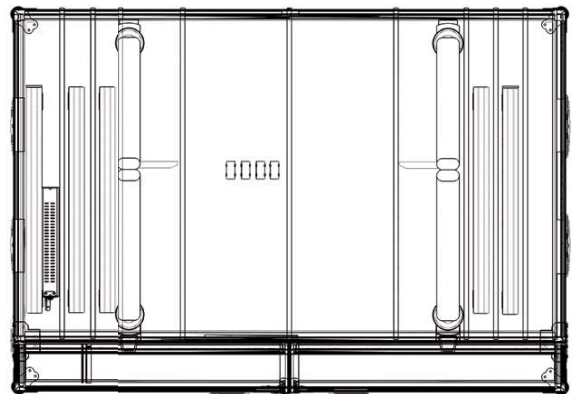









Top view

# Packaging Contents

1. Use pliers to open the wooden case.
2. Please wear protective equipment at all times, such as gloves and protective shoes.

**Before Installation:** Carefully check if all accessories are included in the box. If any items are missing or damaged, please contact your dealer immediately.

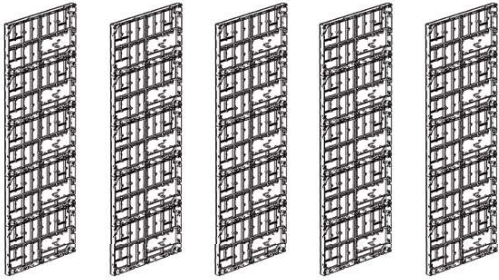LED Cabinet		5 pcs	5 Cabinets per row, total 5 rows
Movable Base		1 set	Includes 2 legs, 2 crossbeams
Wall Mount		1 set	One bracket each on the top and bottom
LED Module		200 pcs	Includes spares, actual quantity may vary
Bluetooth Remote		1 pcs	



Standard Toolkit		1 set	Includes T-shaped wrenches #3,#4,#5,#6, adjustment tools, flat screwdriver, Phillips screwdriver, manual maintenance tool
Screw			M6 x 20 hex screws, M6 x 12 countersunk screws, M4 x 12 screws, M6 x 30 screws, M5 x 25
Clip		12 pcs	M6 x 20 Hex screws included
Front Connector		57 pcs	M4 x 12 Screws included
Network & Power Cables			
Control box		1 pcs	Multi-port & multi-function control box
Gloves		1 pair	Anti-static dust-free gloves

**Notes:**


1. This product is packaged in a wooden or flight case.
2. Due to the size and weight, multiple people or tools are recommended for handling.
3. You can identify the contents via the product labels on the package.

# Product Overview

## Dimensions

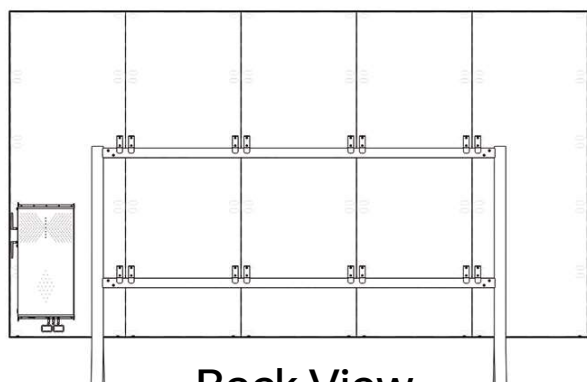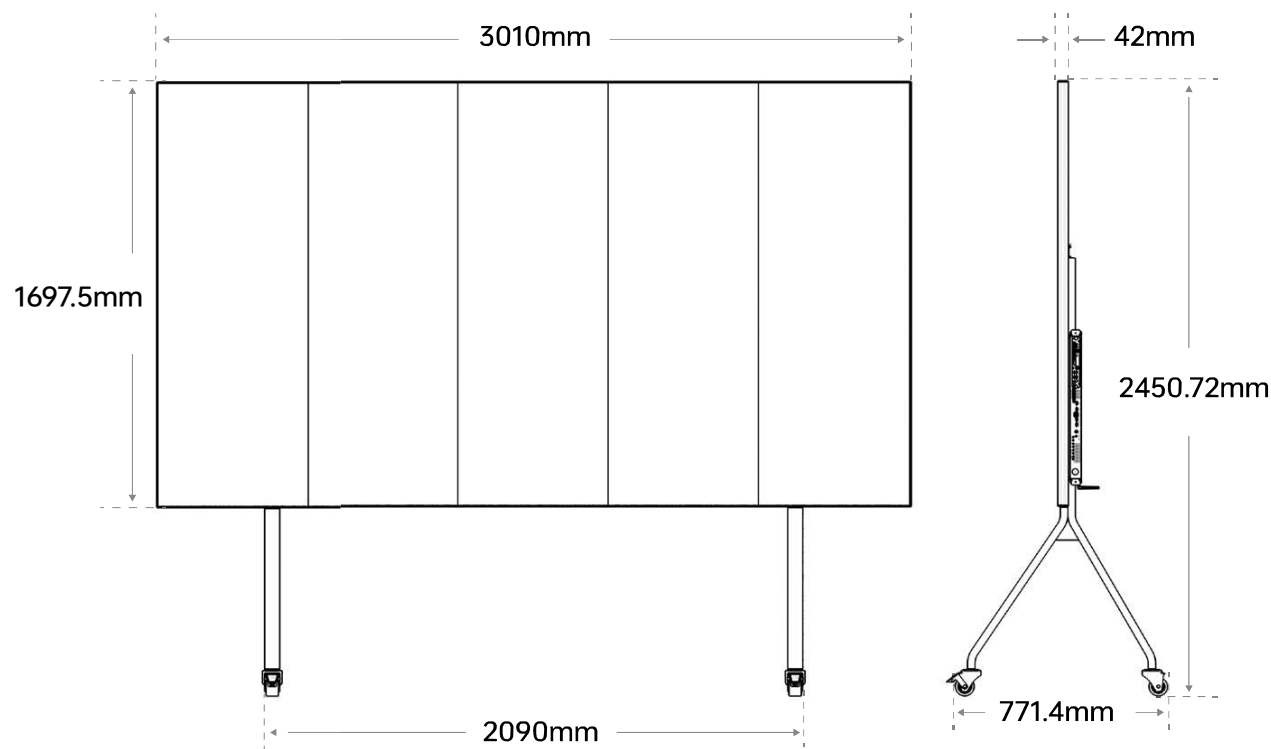


Back View

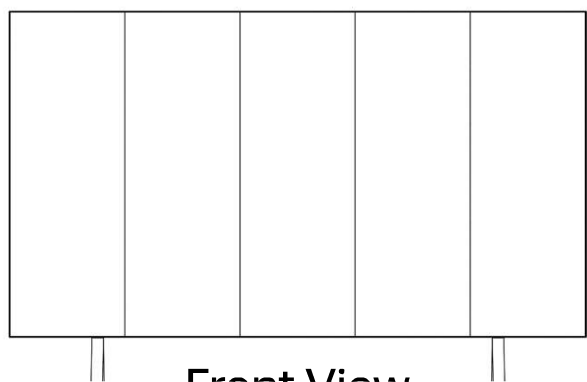

Front View



# Control box with operating system introduction

Support Bluetooth/WiFi connection. Built-in operating system.

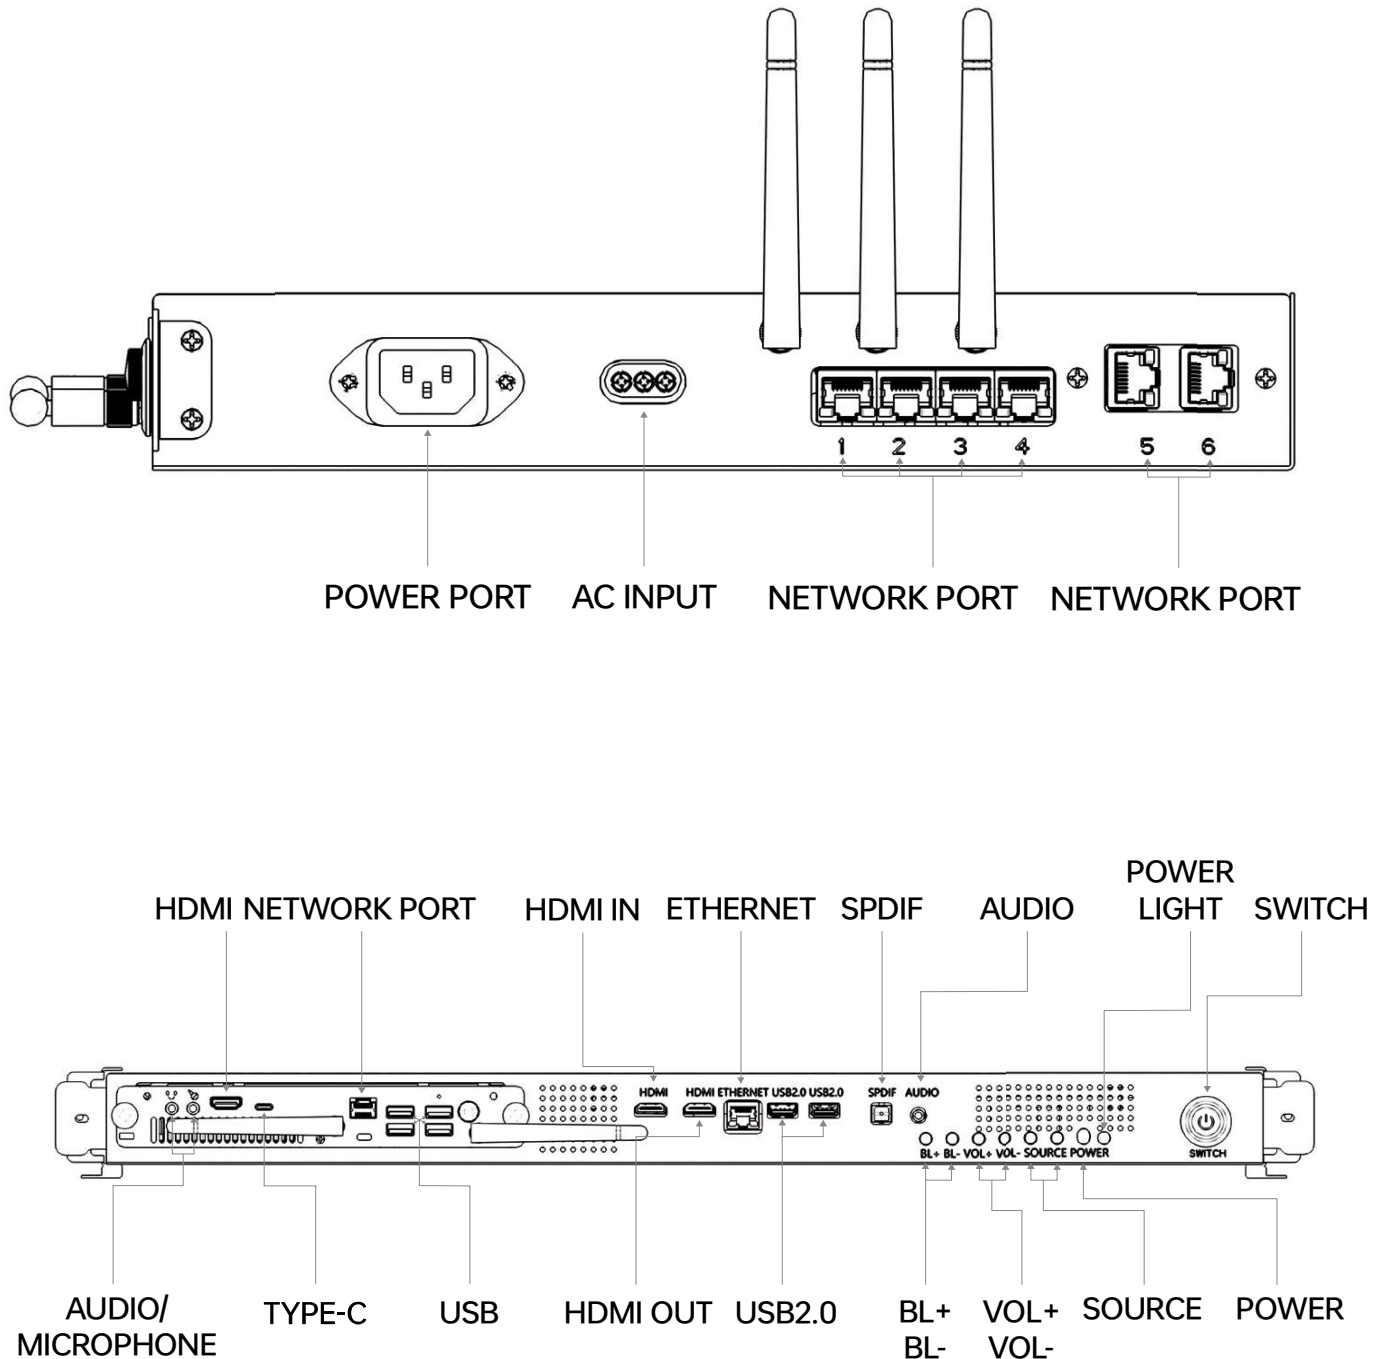

# Control box and interface introduction


Support Bluetooth/WiFi connection.

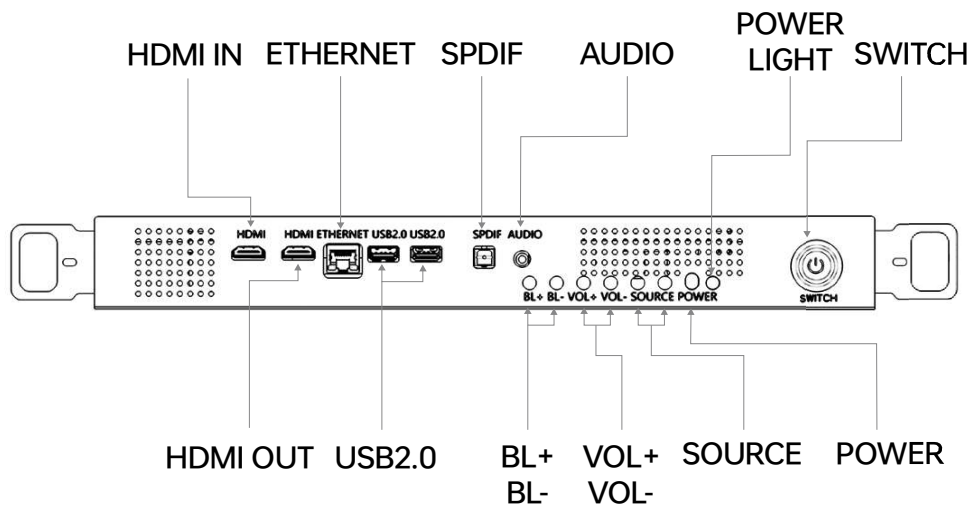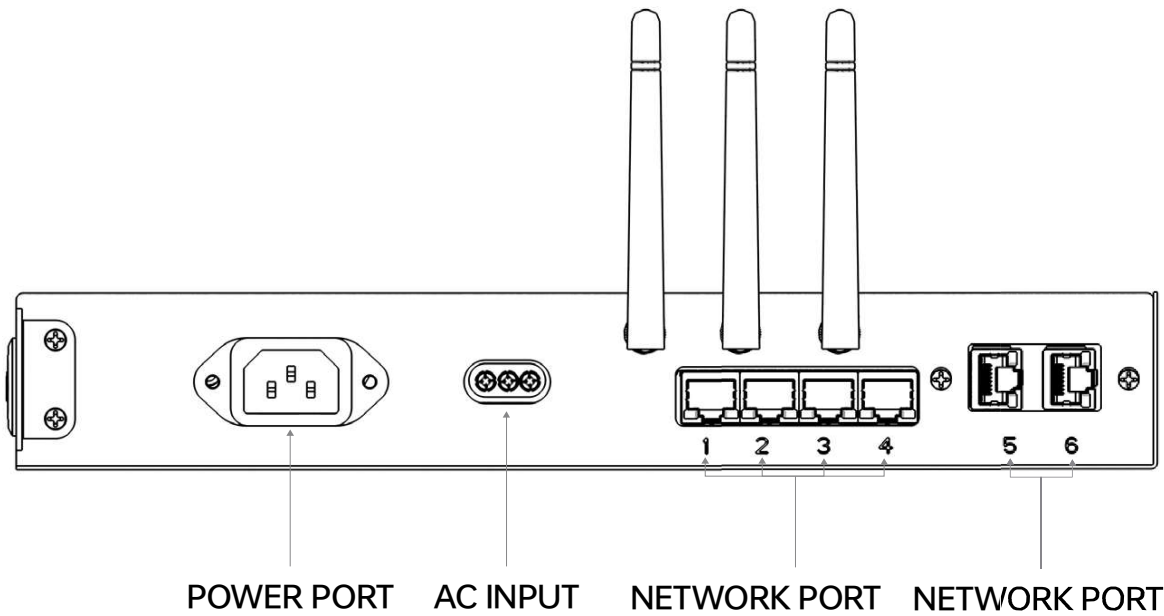



# Remote control operation introduction


Support voice recognition function.

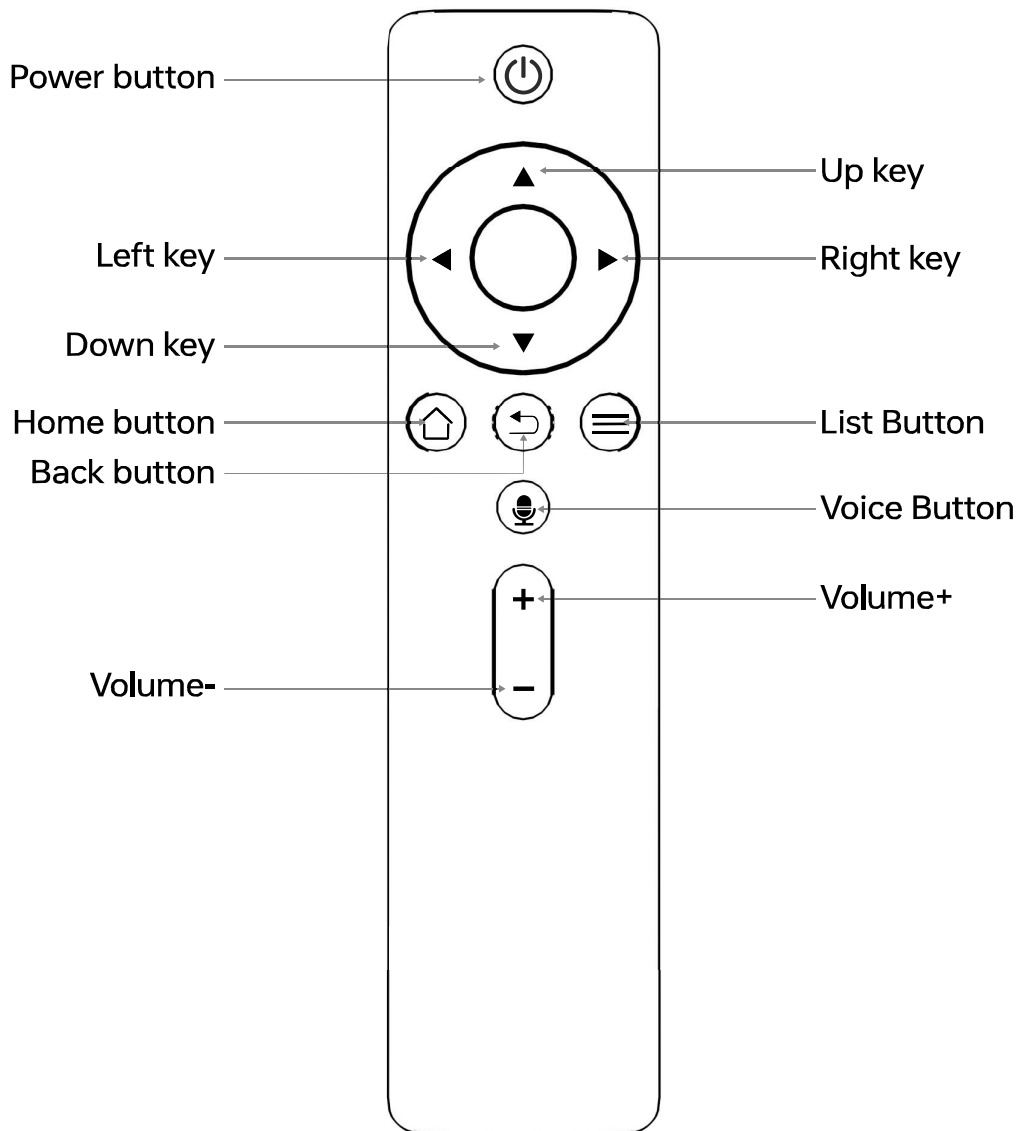

# Introduction

## About LED displays

This LED display is installed on a movable base

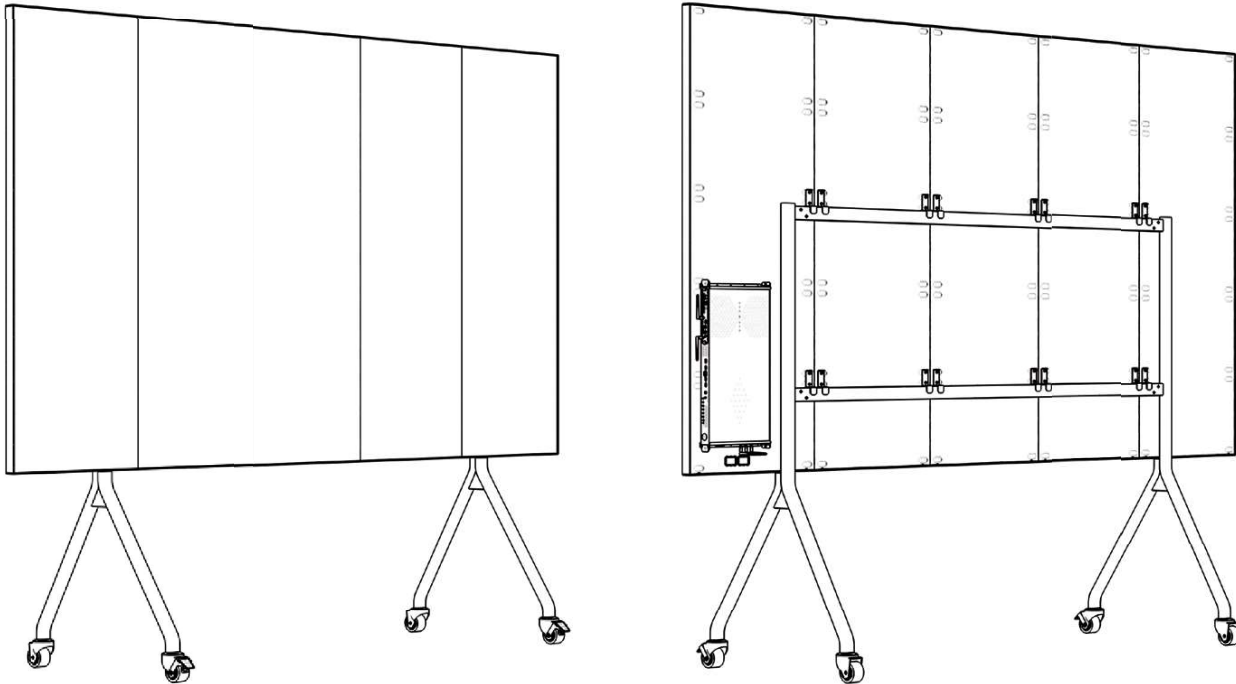


### **Pre-Installation Instructions:**

1. Avoid airflows from air conditioning or heating vents directed towards the LED screen.
2. Do not install in high-humidity locations.
3. Use the dedicated power cable designed for this product due to high power consumption.
4. Ensure floor stability and adequate voltage supply from power outlets.
5. Wear protective gear, such as gloves and safety shoes, at all times.

# Movable Base Installation


This LED display is installed on a movable base

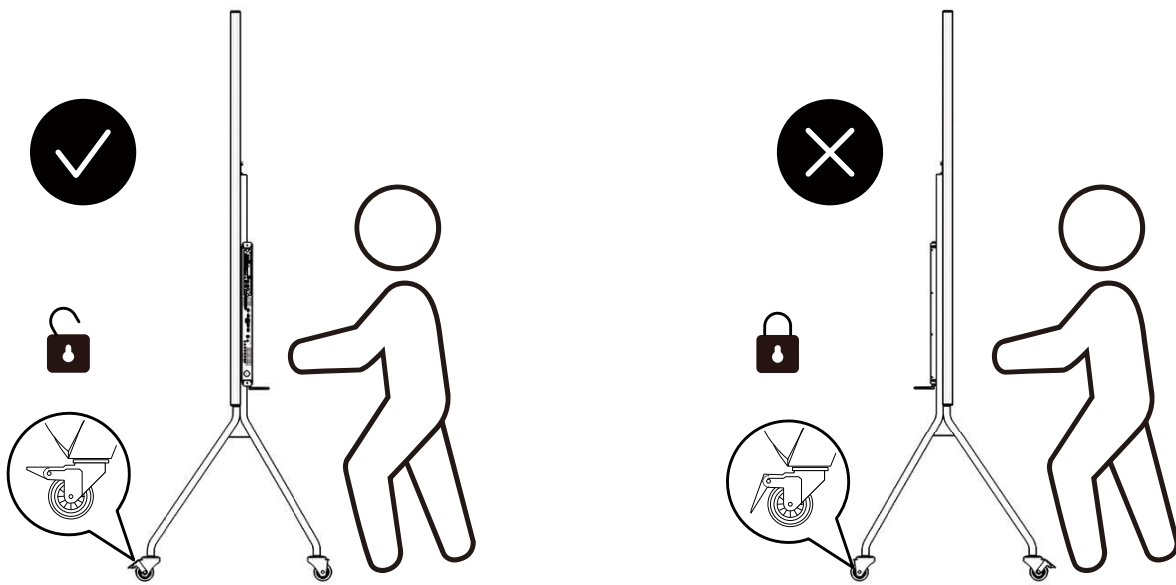


## Pre-Assembly Notes:

1. Avoid moving the screen over cables or on uneven, dirty, soft, or steep surfaces.
2. Stay clear of wheel sections to avoid injury.
3. Do not move the base by pushing the LED screen.
4. Do not push from the front of the LED screen or attempt to lift it.


# Accessories List



Bluetooth Remote



Control Box



LED Module




LED Cabinet



Movable Base



Wall Mount



Toolbox




Magnet Adjustment Tool



Manual Suction Cup




Wrench



Screwdriver




Screw



Clip



Front Connector



Network & Power Cables




Gloves


# Movable Base Installation

Connect the upper and lower beams to the side brackets using M6x12 countersunk screws.


1

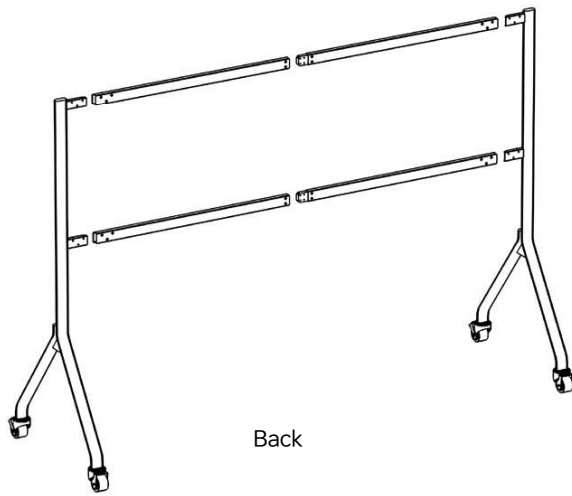


2

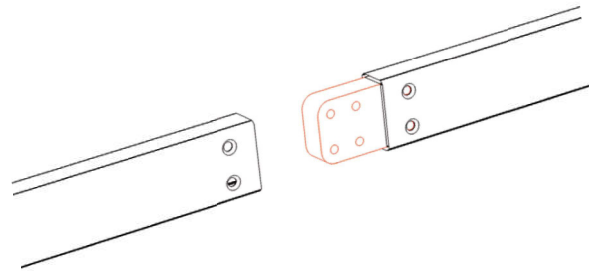

3

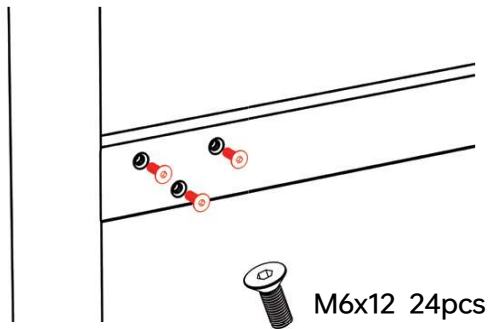

4

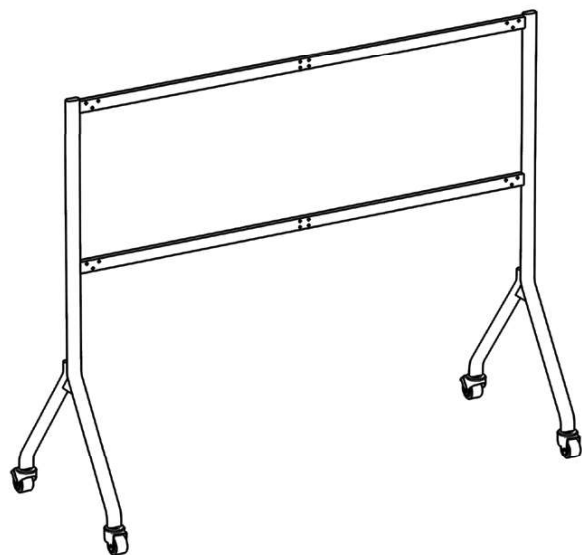


# Screen Installation


1. Attach the clip to the back cover of the cabinet.
2. Mount the cabinets in sequence onto the crossbeams of the movable base.

1


Not required by default

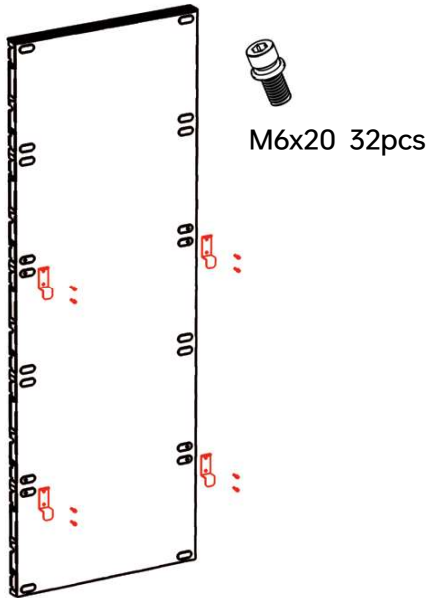


2

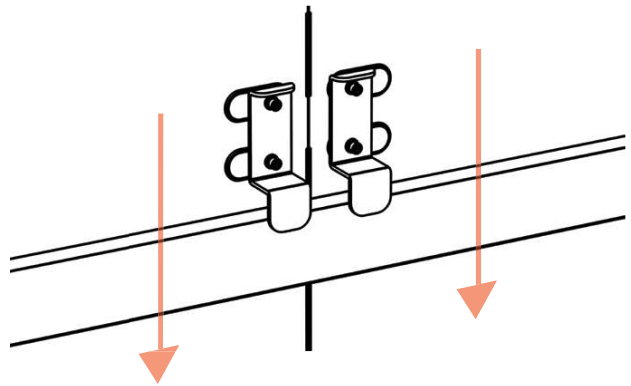

3

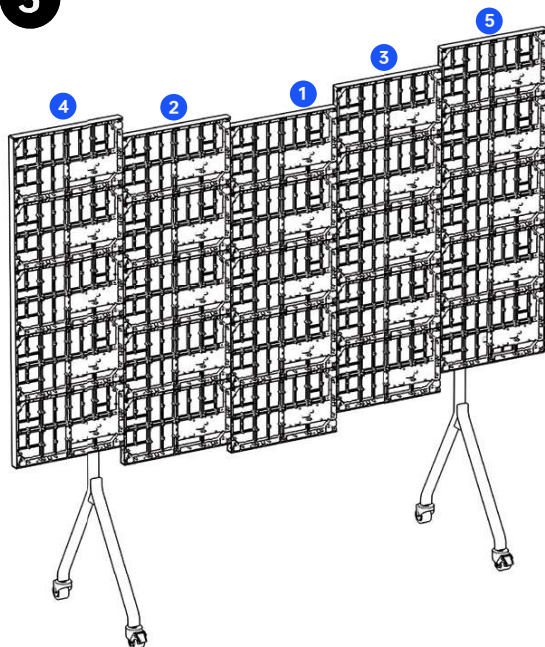


4

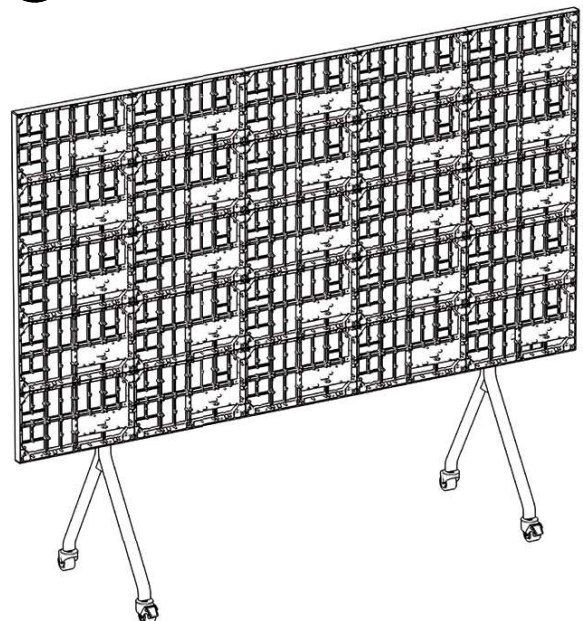


# Wall mounted installation

The installation position of the first root determines the overall installation position.


1

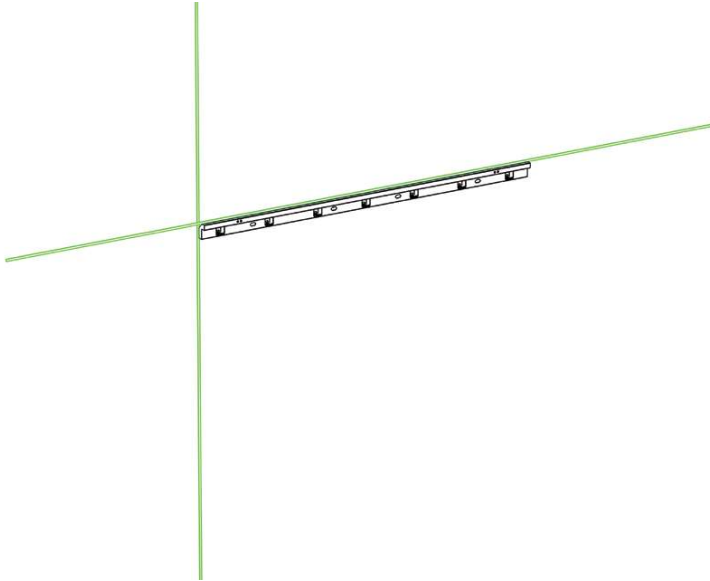


2

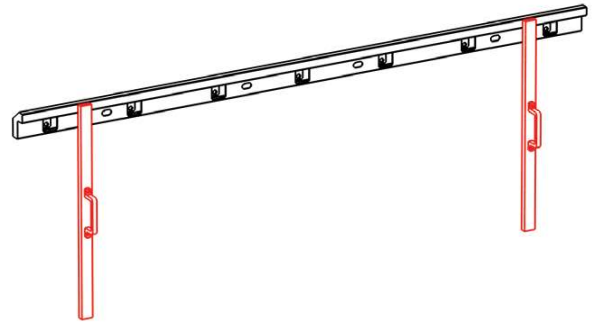

3

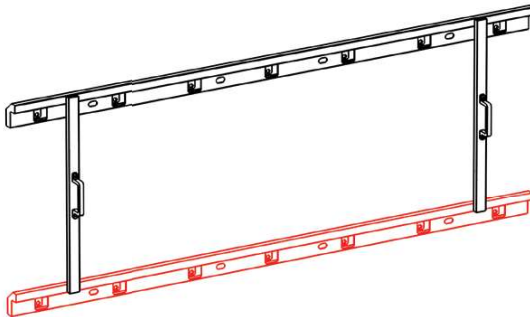

4

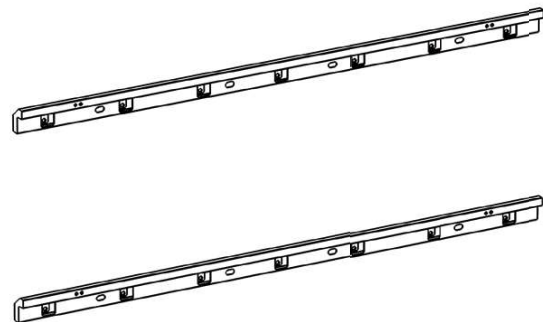




# Screen Installation


1. Attach the clip to the back cover of the cabinet.
2. Install the cabinets one by one on the beams of the Wall Mount.

1


Not required by default

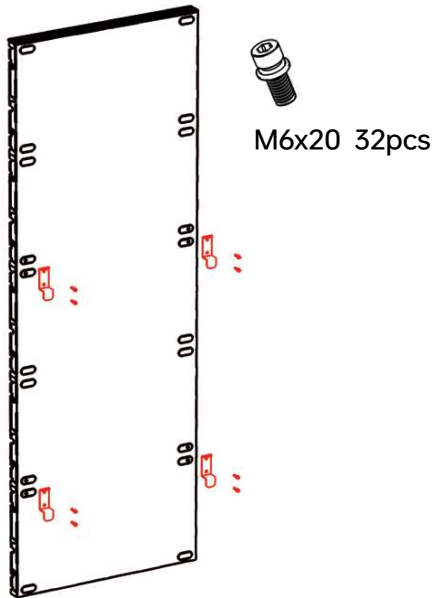


2

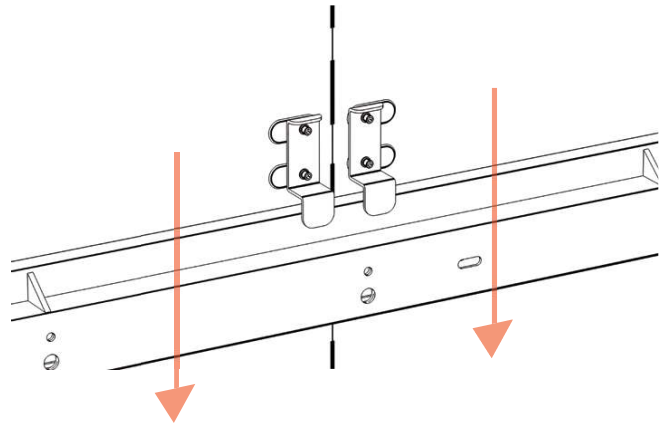

3

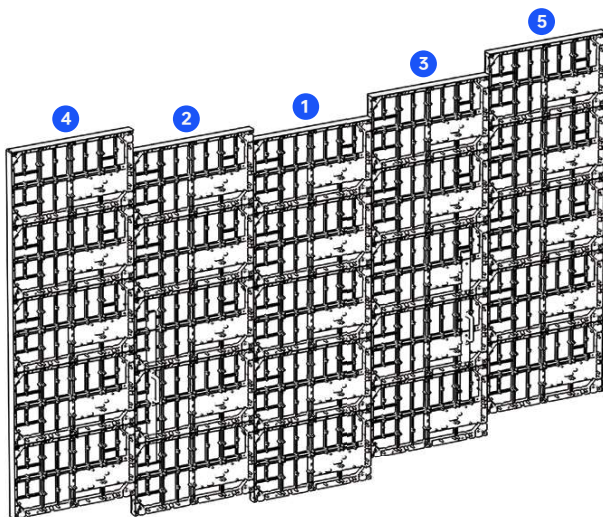


4

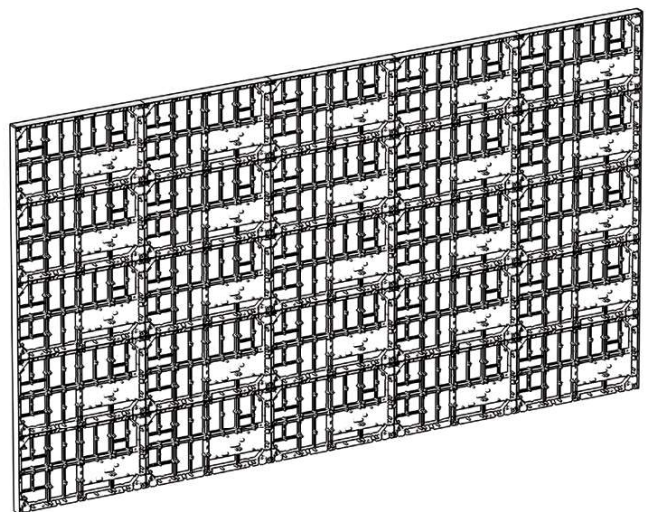




3. Attach the front connector and M6x30 screws to the cabinets.

5

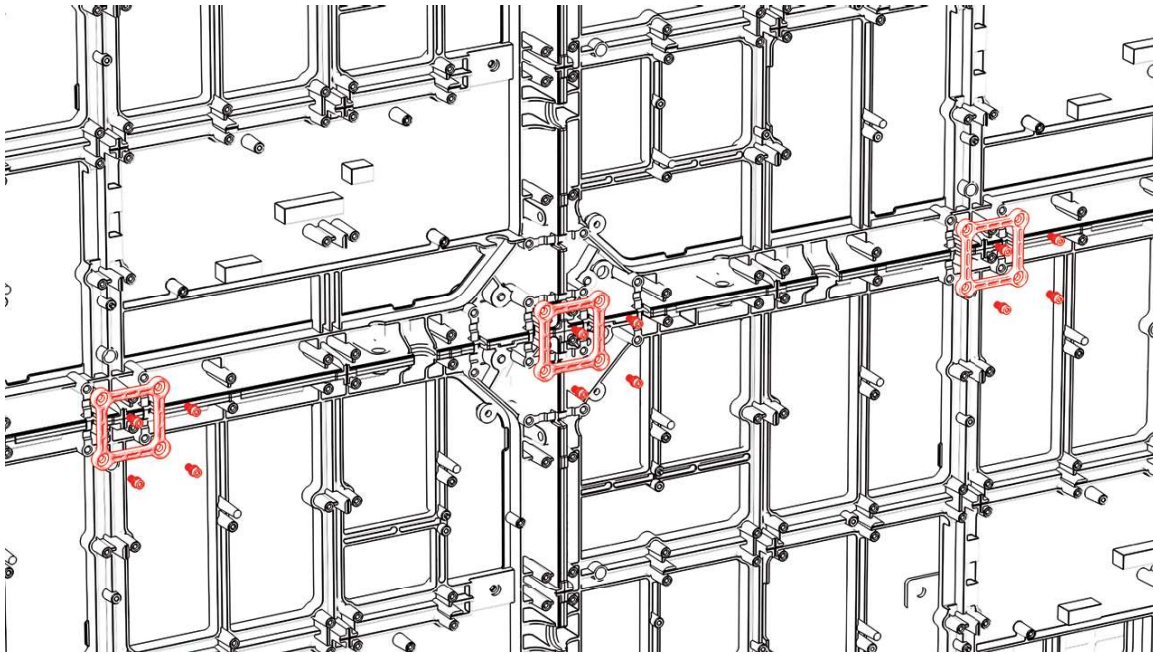



6

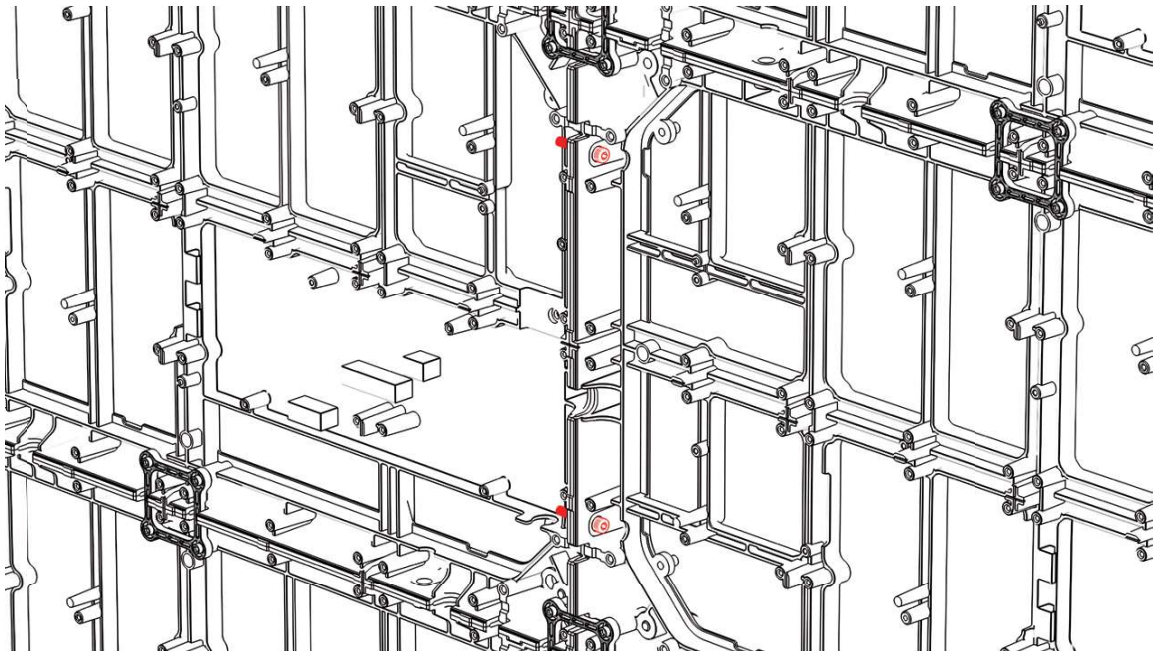

# Network/Power Connections

Connect the network/power cables between the modules and then connect the interface to the control box.

**PS:** Red: Interface that needs manual access    Green: Routing

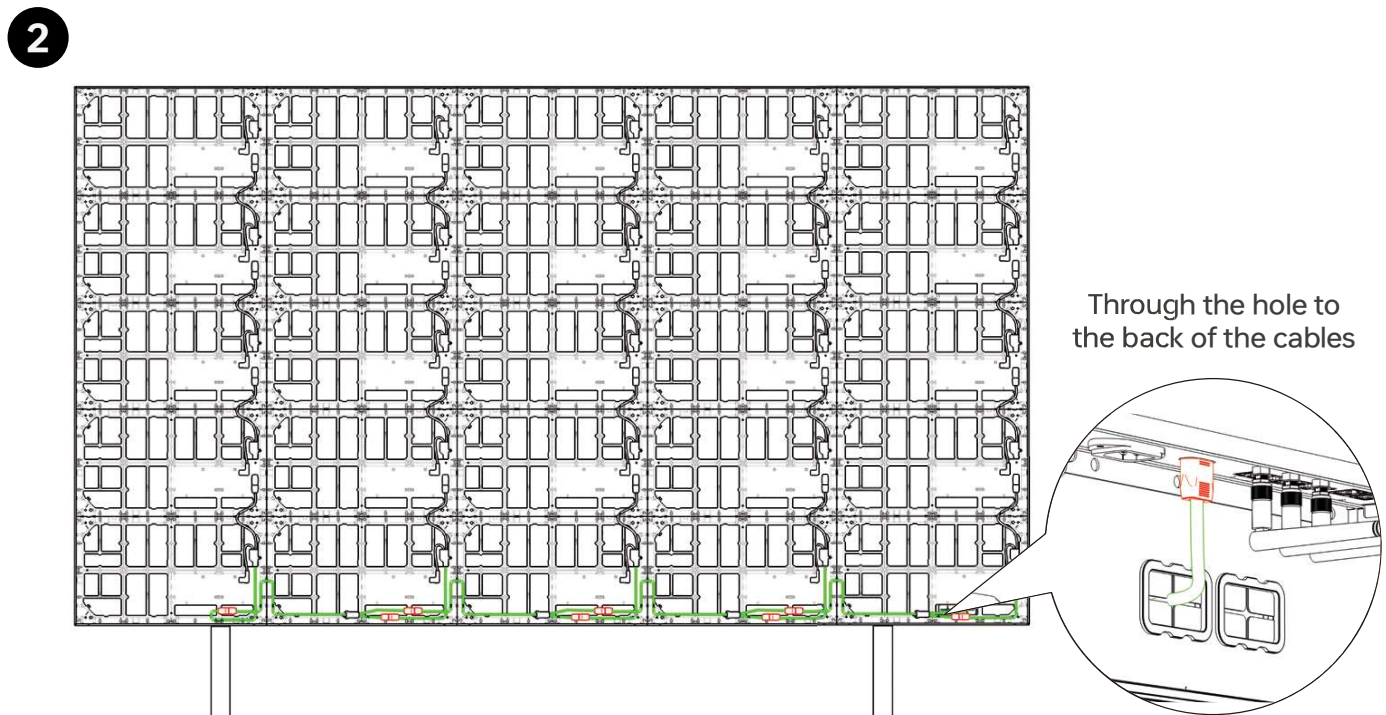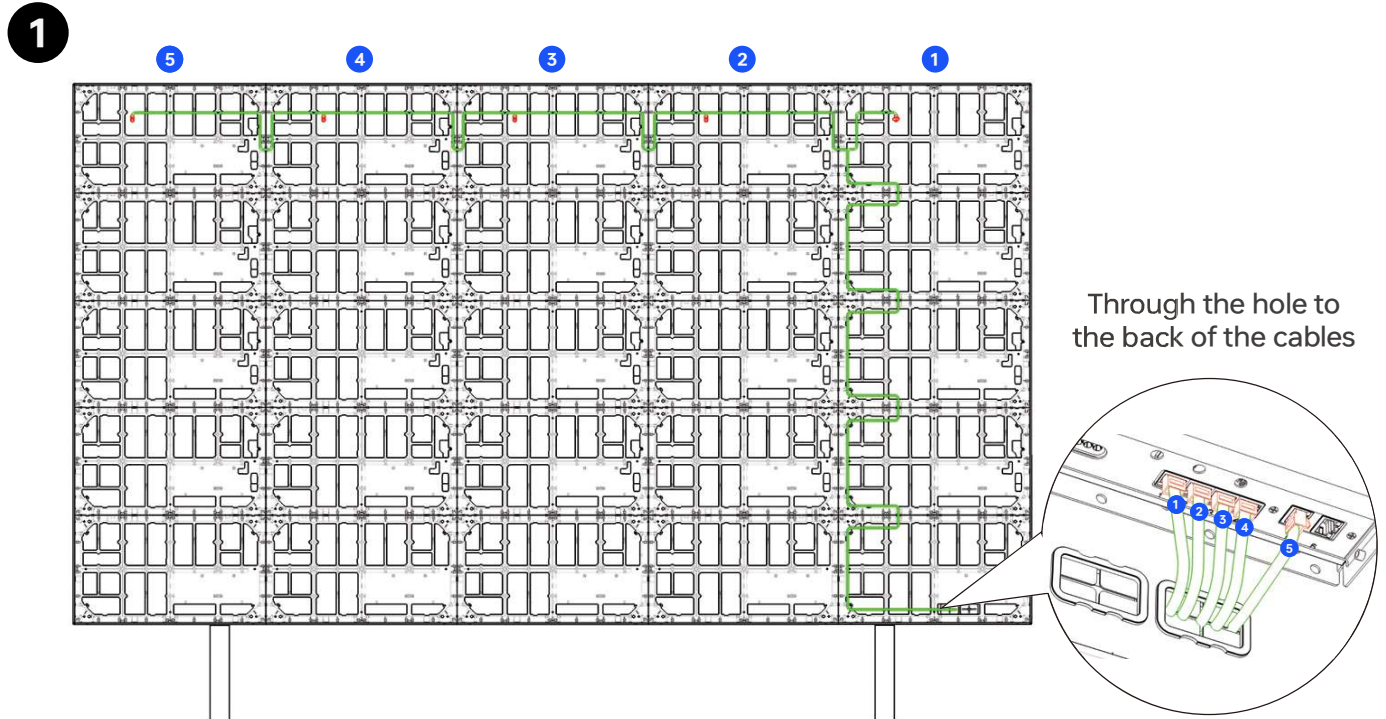


# LED Module Installation




## Precautions:

1. Wear anti-static gloves before installing the LED modules.
  2. Remove watches, rings, bracelets, or any metal objects to prevent direct contact with LED modules.
  3. The arrow mark on the back of the LED module should face upwards.
1. Start from the middle module at the bottom, aligning each LED module with the cabinet, then carefully press the module into place.

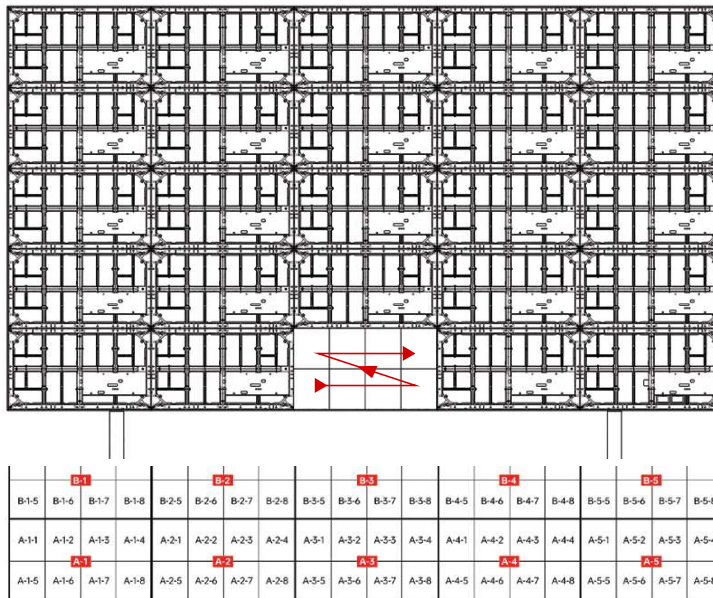

2. Install modules from the middle outwards, ensuring the module number corresponds with the cabinet.

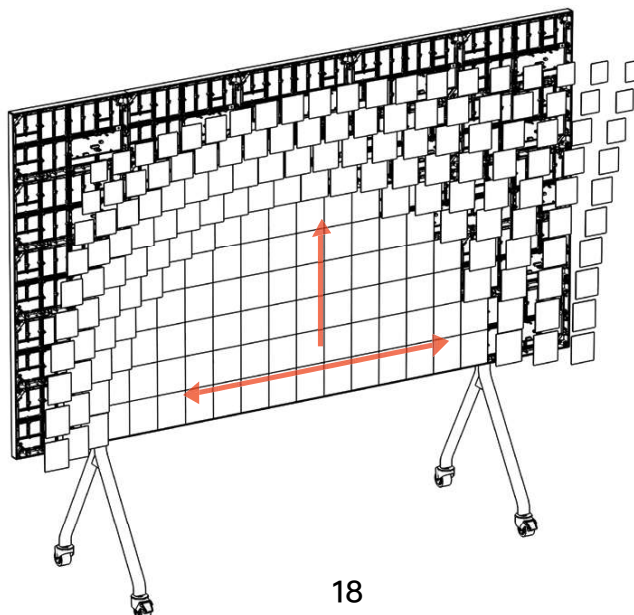




# Powering On the LED Screen

Press the power button to turn on the LED screen.

1

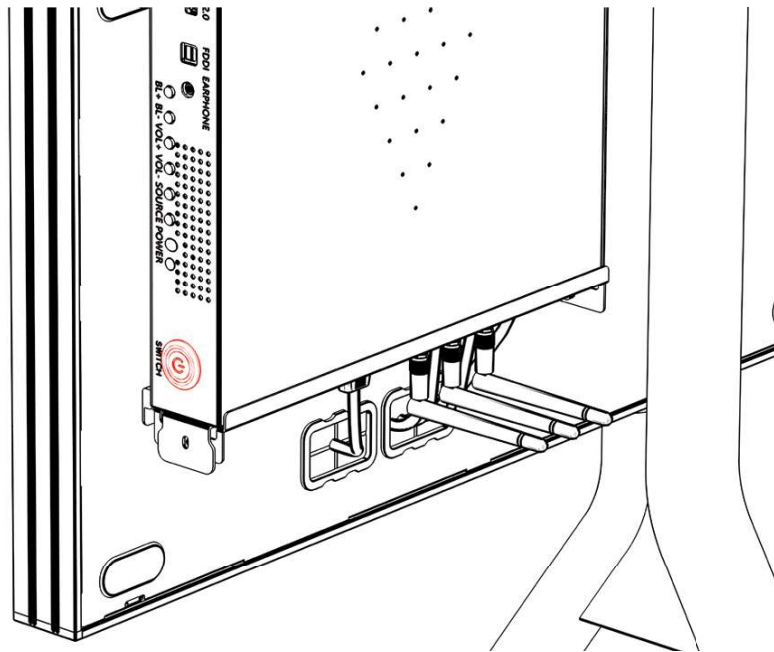

2

